

Fomblin®



SOLVAY

asking more from chemistry®

Fomblin® PFPE Lubes
for Vacuum Applications

**SPECIALTY
POLYMERS**

Fomblin® PFPE: Vacuum Pump Oils

Fomblin® Y grades are perfluorinated polyether inert fluids for use as lubricants in vacuum pumps. Fomblin® PFPE fluids are a mixture of fluorinated polymers obtained by a photochemical process that begins with hexafluoropropylene. Since the Fomblin® PFPE chemical chain contains only carbon, fluorine and oxygen atoms, these fluids have exceptional properties such as:

- Low vapor pressure
- Chemical inertness
- High thermal stability

- Good lubricant properties
- No flash or fire point
- Non-toxicity
- Excellent compatibility with metals, plastics, elastomers
- Good aqueous and non-aqueous solvent resistance
- High dielectric properties
- Low surface tension
- Good radiation stability
- Environmentally acceptable

| Application | Y LVAC Grades | | | | Y LVAC RP Grades Anti-rust Additivated | | | Y HVAC Grade |
|---|---------------|------|------|------|---|--------|-------|--------------|
| | 06/6 | 14/6 | 16/6 | 25/6 | 06/6RP | 14/6RP | 25/6E | 140/13 |
| Rotary pumps – sealing & lubricant fluid | • | • | | • | • | • | • | |
| Turbomolecular pumps – lubrication | • | | | | • | | | |
| Roots pumps – lubrication | | | • | • | | | • | |
| Diffusion pumps – working fluid | | | | | | | | • |




Fomblin® Y LVAC Grades


Y LVAC Grades

| Typical Properties | Units | 06/6 | 14/6 | 16/6 | 25/6 |
|---|-------------------|--------------------|--------------------|--------------------|--------------------|
| Average molecular weight | amu | 1,800 | 2,500 | 2,700 | 3,300 |
| Density at 20°C (68°F) | g/cm ³ | 1.88 | 1.89 | 1.89 | 1.90 |
| Kinematic viscosity at 20°C (68°F) | cSt | 64 | 148 | 168 | 276 |
| Viscosity index | | 71 | 97 | 110 | 113 |
| Vapor pressure | | | | | |
| at 25°C (68°F) | torr | 8·10 ⁻⁷ | 1·10 ⁻⁷ | 9·10 ⁻⁸ | 6·10 ⁻⁸ |
| at 100°C (212°F) | torr | 3·10 ⁻³ | 2·10 ⁻⁴ | 2·10 ⁻⁴ | 6·10 ⁻⁵ |
| Pour point | °C °F | -50 -58 | -45 -49 | -45 -49 | -35 -31 |
| Heat of vaporization at 200°C (392°F) | cal/g | 11 | 8 | 8 | 7 |
| Surface tension at 20°C (68°F) | dyne/cm | 21 | 22 | 22 | 22 |
| Evaporation loss (22 hrs; 149°C for 14/6, 16/6, and 25/6, 120°C for 06/6) | % by wt. | 2.8 | 2.6 | 3.9 | 0.6 |

Fomblin® Y LVAC – kinematic viscosity vs. temperature

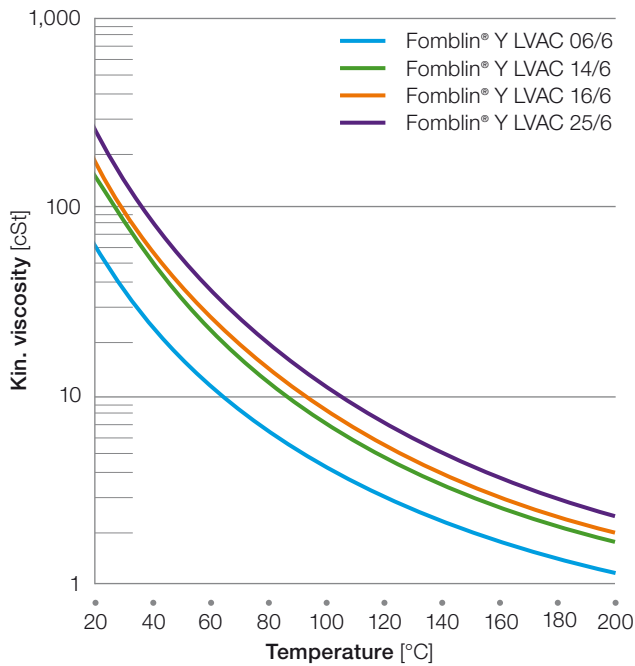

Fomblin® Y LVAC – vapor pressure vs. temperature

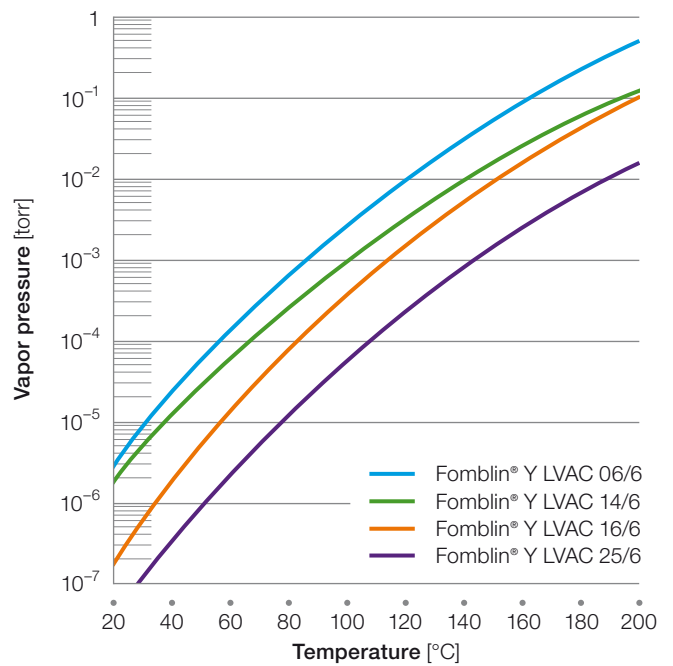

Fomblin® Y LVAC RP Grades

Additivated Grades for Anti-Rust and Anti-Wear

Rust Preventive formulation (LVAC RP) was studied to reduce or prevent rusting when huge amount of water vapors has to be pumped or when metal surfaces of the pump are exposed to moisture. An optimum concentration of additive in Fomblin® Y LVAC grades was studied to provide protection against rust and at the same

time to guarantee the physical properties and the vacuum performance of the grade.

Anti-rust property evaluation

- Fog chamber (method ASTM B117)
- Conditions: temperature = 45 °C, humidity = 90 %

| Sample | Fluid | Fog Chamber Time | Corrosion Degree | Fog Chamber Time | Corrosion Degree |
|------------------|------------------|------------------|------------------|------------------|------------------|
| Cast iron | Y LVAC | 40 mins | 5 | 1 hour | > 5 |
| Low carbon steel | Y LVAC | 40 mins | 4 | 1 hour | 5 |
| Cast iron | Y LVAC RP | 24 hours | 0 | 96 hours | 1-2 |
| Low carbon steel | Y LVAC RP | 24 hours | 0 | 96 hours | 2 |

Rating

0 – No corrosion

1 – Not more than three small spots of corrosion

2 – Small areas of corrosion covering up to 1 % of the surface

3 – Small areas of corrosion covering from 1 % to 5 % of the surface

4 – Small areas of corrosion covering from 6 % to 10 % of the surface

5 – Small areas of corrosion covering more than 10 % of the surface


In addition to its rust protection, Fomblin® LVAC RP shows exceptional anti-wear properties as well.

Anti-wear property evaluation

- 4 ball wear test (ASTM D2266)
- Conditions:
speed = 1,200 rpm, load 40 kg, time = 60 min.

Anti-wear evaluation of oil

| Grade | T = 75 °C | Diff | T = 150 °C | Diff |
|-----------------------|-----------|-------|------------|-------|
| Fomblin® Y LVAC 25/6 | 1.1 mm | – | 0.85 mm | – |
| Fomblin® Y LVAC 25/6E | 0.96 mm | –13 % | 0.74 mm | –13 % |




Y LVAC RP Grades


| Typical Properties | Units | 06/6RP | 14/6RP | 25/6E |
|--|-------------------|--------------------|--------------------|--------------------|
| Average molecular weight | amu | 1,800 | 2,500 | 3,300 |
| Density at 20 °C (68 °F) | g/cm ³ | 1.88 | 1.89 | 1.90 |
| Kinematic viscosity at 20 °C (68 °F) | cSt | 73 | 165 | 305 |
| Viscosity index | | 71 | 97 | 113 |
| Vapor pressure | | | | |
| at 25 °C (68 °F) | torr | 5·10 ⁻⁶ | 3·10 ⁻⁷ | 1·10 ⁻⁷ |
| at 100 °C (212 °F) | torr | 3·10 ⁻³ | 2·10 ⁻⁴ | 6·10 ⁻⁵ |
| Pour point | °C °F | -50 -58 | -45 -49 | -35 -31 |
| Heat of vaporization at 200 °C (392 °F) | cal/g | 11 | 8 | 7 |
| Surface tension at 20 °C (68 °F) | dyne/cm | 21 | 22 | 22 |
| Evaporation loss (22 hrs; 149 °C for 14/6RP and 25/6E, 120 °C for 06/6RP) | % by wt. | 3.1 | 2.9 | 0.9 |

Fomblin® PFPE anti-rust additivated grades maintain the same viscosity and vapor pressure behavior than not additivated ones. As the following charts show:

**Fomblin® Y LVAC RP –
kinematic viscosity vs. temperature**

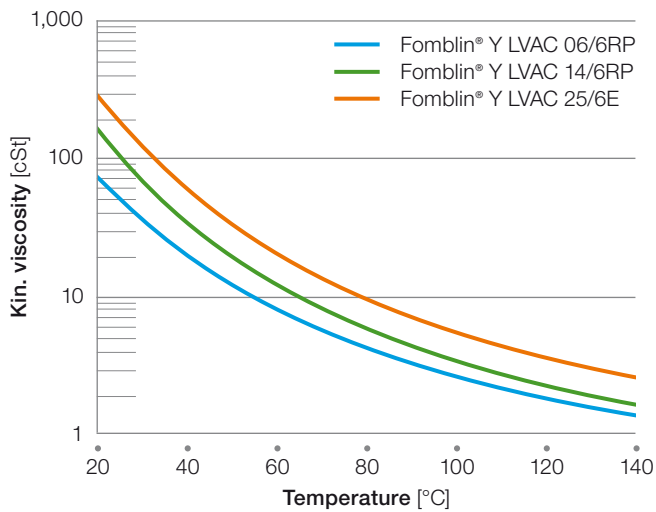

**Fomblin® Y LVAC RP –
vapor pressure vs. temperature**

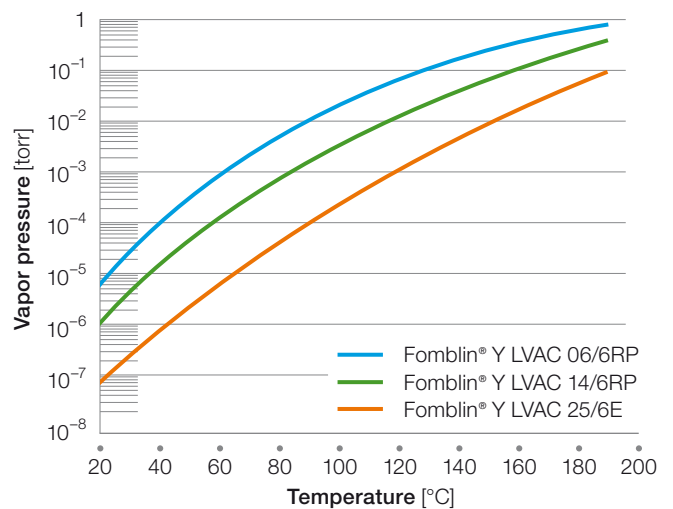

Fomblin® Y HVAC Fluids


Perfluoropolyether Fluids for Diffusion Pumps

There are several advantages to using Fomblin® Y HVAC fluid in diffusion pumps:

- Will not polymerize when exposed to oxygen, ionizing radiation or accelerated subatomic particles. The system stays free of varnish and deposits from fluid decomposition
- Non-flammable
- Resistant to oxidation of explosion and hot fluid can be exposed repeatedly to air without harm to the fluid while running the pumps
- Inert to most reactive chemicals, the fluid can be used in direct contact with materials such as UF₆, F₂, PCl₃, BF₃, without harm to the fluid

Fomblin® Y HVAC fluid has been specially developed in order to combine narrow molecular weight range and controlled viscosity with an extremely low vapor pressure. Thus, they provide superior performance in high vacuum applications, especially systems exposed to aggressive gases.

Fomblin® Y HVAC – kinematic viscosity vs. temperature

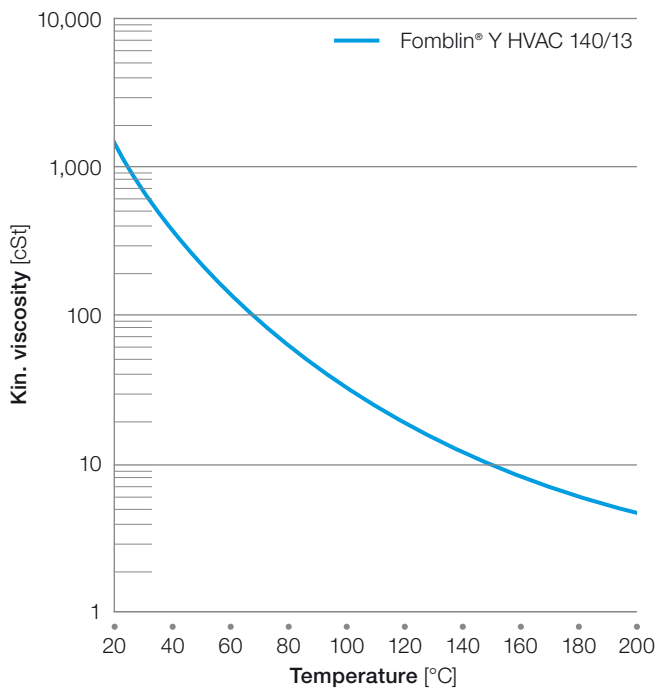


Y HVAC Grade

| Typical Properties | 140/13 | Units |
|--------------------|--------|-------|
|--------------------|--------|-------|

| | | |
|---|-------------------|-------------------|
| Average molecular weight | 6,600 | amu |
| Density at 20 °C (68 °F) | 1.92 | g/cm ³ |
| Kinematic viscosity | | |
| at 20 °C (68 °F) | 1,508 | cSt |
| at 100 °C (212 °F) | 32 | |
| at 200 °C (392 °F) | 5 | |
| Pour point | -23 °C -9.4 °F | |
| Refractive index at 20 °C (68 °F) | 1.304 | n ₂₀ D |
| Specific heat at 38 °C (100 °F) | 0.24 | cal/g |
| Surface tension at 25 °C (77 °F) | 20 | dyne/cm |
| Heat of vaporization at 200 °C (392 °F) | 5 | cal/g |

Fomblin® Y HVAC – vapor pressure vs. temperature

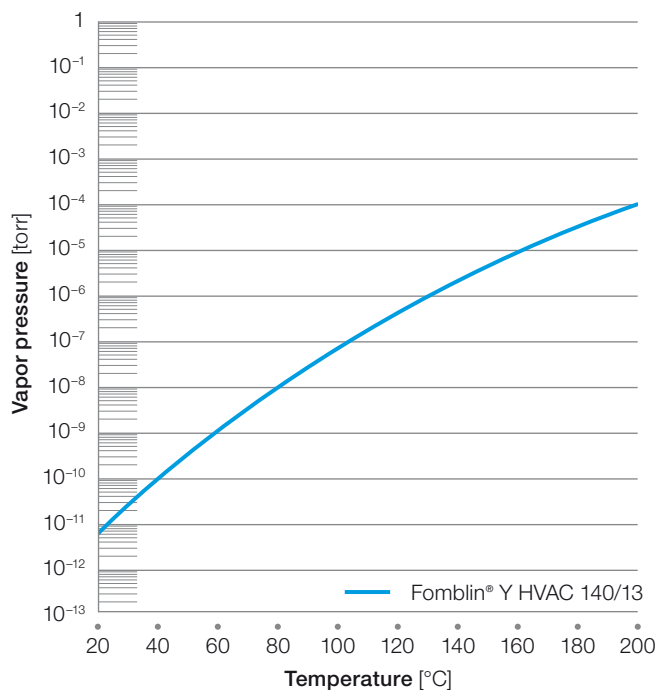

Usage

In most cases the Fomblin® PFPE fluid can be used in the diffusion pumps without any modification to the pump. The major advantage in changing to Fomblin® PFPE fluid is the reduction in contamination of the vacuum apparatus due to their very low backstreaming characteristics and elimination of solid deposit formation. Fomblin® Y HVAC fluids need adequate heating power in order to obtain optimum pumping speed and vacuum stability. Working in the appropriate temperature range, the use of a cooling baffle is not critical with regard to ultimate pressure value, but best stability performance have been obtained with a single water cooled baffle. Low ultimate pressure is a typical benefit. It is recommended that fluid temperature be kept below 280 °C for long fluid life. Under recommended operating procedures, Fomblin® PFPE fluids will not decompose. However, gross pump misuse above 290 °C could result in partial decomposition and release of toxic gases. Improved safety can be obtained by absorbing the gases in a glass tube filled with granular calcium oxide at the end of the vacuum system.

Total Fomblin® Vacuum Technology

The Roughing Pump

To obtain maximum benefit from the use of Fomblin® PFPE in the diffusion pump, it is desirable to minimize backstreaming of hydrocarbon vapors from the mechanical roughing pump. This can only be assured by changing the fluid in the roughing pump to the appropriate Fomblin® Y LVAC fluid, such as Y LVAC 06/6, 14/6, or 25/6. If hydrocarbon oil is used in the mechanical pump, it is desirable to insert an efficient trap (cryogenic, copper wool, alumina, zeolite) in the inlet line to the roughing pump.

Vacuum System Cleaning

Galden® SV55 are excellent non-CFC cleaner solvent for pumping systems using PFPE-based fluids and greases.

Applications

Fomblin® Y HVAC fluids are suggested for applications requiring the highest quality vacuum such as in scanning electron and transmission microscopes, mass spectrometers, particle accelerators, ion implantation, plasma and vapor deposition processes. In addition, it is suggested for pumps handling reactive gases such as UF₆, F₂, oxygen, ozone and tritium, as the fluid can be used in direct contact with these gases without reaction and fluid degradation.

Miscibility

Fomblin® PFPE and mineral and hydrogenated synthetic oils are not miscible. In order to switch to Fomblin® PFPE, the diffusion pump must be cleaned as thoroughly as possible before filling to ensure that no traces of solvent are present which may affect vacuum performance. The procedure for cleaning diffusion pumps working with PFPE fluids is as follows:

1. Dismantle pump and extract inner bell,
2. Drain existing oil,
3. Wash three times with Galden® SV55 solvents. All solvent to remain in pump for several minutes each time before draining,
4. Dry all metal parts in an oven to remove traces of solvent.



Specialty Polymers

Worldwide Headquarters

SpecialtyPolymers.EMEA@solvay.com

Viale Lombardia, 20
20021 Bollate (MI), Italy

Americas Headquarters

SpecialtyPolymers.Americas@solvay.com

4500 McGinnis Ferry Road
Alpharetta, GA 30005, USA

Asia Headquarters

SpecialtyPolymers.Asia@solvay.com

No.3966 Jindu Road
Shanghai, China 201108

www.solvay.com

Safety Data Sheets (SDS) are available by emailing us or contacting your sales representative. Always consult the appropriate SDS before using any of our products.

Neither Solvay Specialty Polymers nor any of its affiliates makes any warranty, express or implied, including merchantability or fitness for use, or accepts any liability in connection with this product, related information or its use. Some applications of which Solvay's products may be proposed to be used are regulated or restricted by applicable laws and regulations or by national or international standards and in some cases by Solvay's recommendation, including applications of food/feed, water treatment, medical, pharmaceuticals, and personal care. Only products designated as part of the Solviva® family of biomaterials may be considered as candidates for use in implantable medical devices. The user alone must finally determine suitability of any information or products for any contemplated use in compliance with applicable law, the manner of use and whether any patents are infringed. The information and the products are for use by technically skilled persons at their own discretion and risk and does not relate to the use of this product in combination with any other substance or any other process. This is not a license under any patent or other proprietary right.

All trademarks and registered trademarks are property of the companies that comprise the Solvay Group or their respective owners.
© 2017, Solvay Specialty Polymers. All rights reserved. R 10/2017 | Version 2.7 Brochure design by ahlersheinel.com